

RECEIVED

AUG 30 3 2001

Technology Center 2600

22

Please replace the paragraph beginning on page 7, line 11 with the following rewritten paragraph:

SUMMARY OF THE INVENTION

An object of the present invention is to provide a display apparatus capable of preventing the occurrence of electrostatic charges on a display screen and leakage of an electromagnetic field from the display screen, and also preventing the breakage of a conductive film provided on the display screen for reducing the leakage of an electromagnetic field.

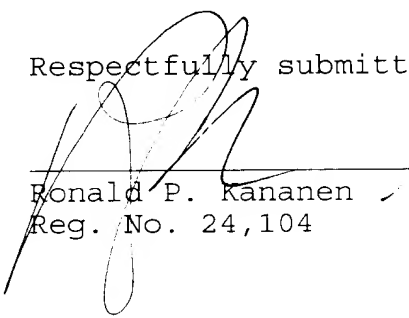
REMARKS

This preliminary amendment is requested to correct typographical errors.

Entry of the foregoing amendment prior to examination is respectfully requested. An early and favorable action on the material is respectfully requested. Should there be any questions regarding the application, the Examiner is invited to telephone the undersigned at telephone number listed below.

Respectfully submitted,

Date: August 1, 2001


Ronald P. Kananen
Reg. No. 24,104

RADER, FISHMAN & GRAUER, PLLC
The Lion Building
1233 20th Street, N.W., Suite 501
Washington, D.C. 20036
Tel: (202) 955-3750
Fax: (202) 955-3751
Customer No. 23353

RECEIVED
AUG 03 2001
Technology Center 2600

APPENDIX

IN THE SPECIFICATION:

Please replace the paragraph beginning on page 2, line 3, with the following rewritten paragraph:

- - To more effectively reduce the leakage of electromagnetic fields from a display apparatus, there has been disclosed a method of providing a transparent conductive film on a display screen of the display apparatus and connecting the conductive film to a ground portion of the display apparatus (Technical Report of Television Association, Vol. 12, No. 2, 1995. 1).

Please replace the paragraph beginning on page 7, line 3, with the following rewritten paragraph:

-- SUMMA[E]RY OF THE INVENTION

An object of the present invention is to provide a display apparatus capable of preventing the occurrence of electrostatic charges on a display screen and leakage of an electromagnetic field from the display screen, and also preventing the breakage of a conductive film provided on the display screen for reducing the leakage of an electromagnetic field.--